

BAMMURA

BAMMURA BEVEL LUXURY BAMBOO WALL TILES

Origins & Eco-Credentials

Bammura Bevel bamboo tiles are made from Moso bamboo [*Phyllostachys edulis* & *Phyllostachys pubescens*] harvested sustainably from the vast bamboo forests that cover much of Anji County in China.


Production & Processing

After harvesting, the Moso bamboo poles are cut into long strips and the outer skin removed. They can then be processed into boards.

The various colours of boards are created through the following natural processes: the natural shade is created by air drying; the caramel colour by steaming. The bamboo strips are held together with resin - **no other materials, fillers or additives are used.**

Tile Construction

We selected plain pressed bamboo boards as the base material for our tiles because the 'nodes' or joints of the bamboo are more clearly visible. This produces an attractive grain across the surface of each tile. The **strong 10mm 3-ply** construction also has bevelled edges which create a striking 3-d tiled effect.

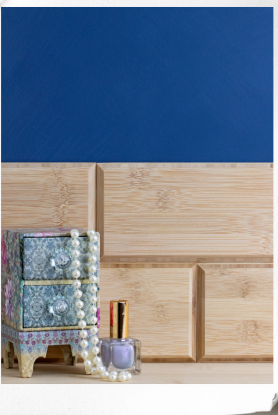

A new style in surface design...



Durable



Sustainable



Paintable



Design-friendly

All tiles are sold by the square metre - visit www.ukbamboo.com

BAMMURA Product Range

There are 2 standard Bammura Bevel tiles to choose from, available in Caramel and Natural.


BEVEL SQUARE - *Modern geometric*

The 10mm thick tiles are hand finished for extra smoothness.



BEVEL BRICK - *Classic style*

The 45° bevelled edge reveals the intricate layers of each tile and creates interest from all angles.

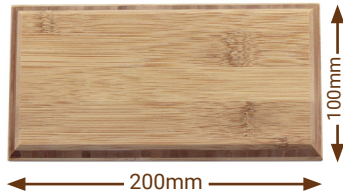


The BAMMURA brand & BAMMURA Bevel Bamboo Tiles are owned and manufactured by UK Bamboo Supplies Ltd.

Design & Installation

Wall Tile Patterns

With our square and brick tiles there are numerous possible surface patterns. Here are just some of the most popular to inspire you. You can find more ideas on our website.

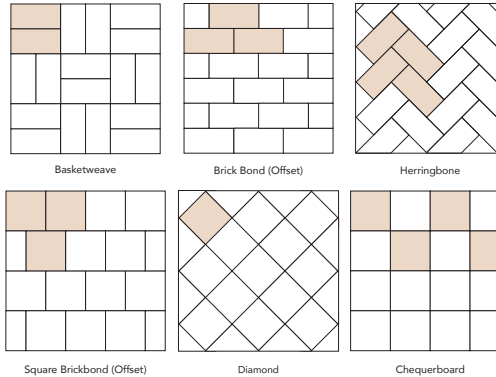

Fixing to Surfaces

We recommend the use of grab adhesive applied directly to the surface where you are installing the tiles. Where the walls are uneven or where direct installation may not be permitted, you can attach them to a backing board such as 6mm plyboard. The tiles can also be used to create a work surface or table top. Apply a sealant appropriate for the finished location: e.g. Tung Oil for a kitchen counter.



Above: The grab adhesive can be applied to each tile individually or you can apply directly to the wall, or a little on both. **N.B.** One or both surfaces must be porous for the best adhesion.

[Shown here: *No Nonsense Solvent Free Grab Adhesive*]

Finish & Aftercare

Bammura Bevel tiles are supplied untreated and unvarnished so that you can apply your own finish. Use wood oil, clear varnish or a wood stain to seal them. Water-based acrylic stains can also be used to create vibrant feature tiles or a border. A clear top coat of varnish must be applied in order to seal-in the colour.

Wipe down with a damp cloth to remove dust and dirt. Oiled tiles can be maintained with further coats from time-to-time.

Below Right: Caramel Brick tile is sealed with *Osmo Clear Top Oil* - the bottom tile is untreated.



Above Left: A Natural Brick tile has been stained with *Liberon Green* then roughly sanded along the edges and surface to reveal parts of the natural tile underneath. We then finished with two coats of high gloss varnish.

UK Bamboo Supplies Ltd. Unit 4 New Place, Framfield Road, Uckfield, East Sussex, TN22 5EQ.
Email: sales@ukbamboo.com - Tel:01825 890041 - Registered in England & Wales 05011562

